



PRODUCT INFORMATION

The Lifting and Material Handling Experts

241 Series Articulating Lift Arms OVERVIEW

A high-performance alternative to traditional jib cranes, our articulated arms are ideal for light to medium duty lifting applications.

- Free and easy movement of loads from 55kg to 125kg
- Fully pneumatic, with powered and balanced lifting configurations available
- Reaches up to 3500mm, with 360° slewing
- A large range of standard accessories

Our floor mounted 241 series articulated arms include a pneumatic hoist, a range of lift capacities and reach options, and up to 360° slewing of the outer arm for complete freedom of movement.

The outer pulley is a bespoke swivelling design which always aligns with the cable to reduce wear and prevent cable jams and damage.

A high-quality pneumatic hoist is integrated into the outer arm, providing powered up/down controls, or alternatively a precise balanced lift mode.



UP TO 125 KG UP TO 2m LIFT UP TO 3.5m REACH

Base articulated arm unit with column & 360° outer arm



APPLICATIONS





Articulated arm with bespoke gripper for handling Inverter assemblies on an electric vehicle production line.



Articulated arm with standard dual load balance handle and safety hook, providing a multirole handling aid



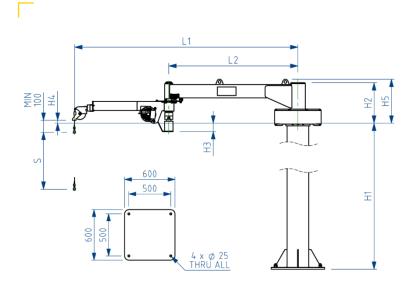



Key Dimensions											
Part Number	SWL	R1	R2	L1	L2	H1†	H2	Н3	Н4	Н5	S
MLA-241-55.2400	55	2400	750	2508	1450	2500	453	95	32	493	2032
MLA-241-55.3395	55	3395	980	3513	1950	2500	453	95	32	493	2032
MLA-241-70.2400	70	2400	750	2513	1450	2500	453	97	5	493	3048
MLA-241-125.2400	125	2400	750	2513	1450	2500	453	97	5	493	2032
MLA-241-70.3395	70	3395	980	3513	1950	2500	453	97	5	491	3048
MLA-241-125.3395	125	3395	980	3513	1950	2500	453	97	5	491	2032



ACCESSORIES

